


# MOTORBIKE

## FORK 10 -SYNTHETIC PLUS

### MAINTENANCE


**Grades available:** 5 – 10 – 15 – 20 – 30

Fork 10 is a semi synthetic lubricant, compatible with all types of forks, for, road and off-road use, designed for regular use. IPONE has selected the best synthetic bases and additives to guarantee Fork 10 has a low-friction formula, which ensures comfortable driving and improved shock absorption.

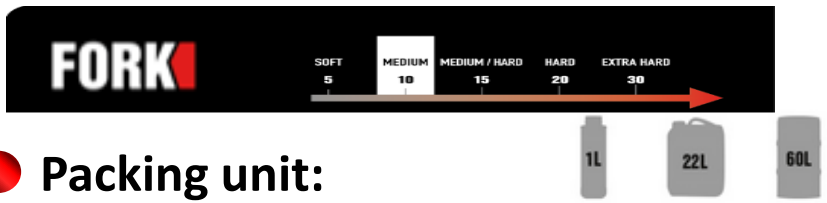

● **Packing unit:**

● **Technical data:**

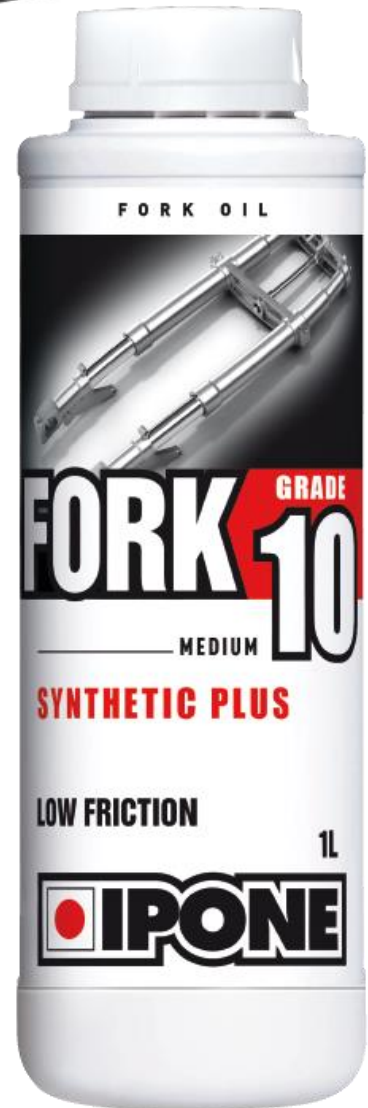

TEST	Method	Typical values					Measure units
		FORK 5	FORK 10	FORK 15	FORK 20	FORK 30	
Density at 20°C	ISO 12185	0,851	0,866	0,873	0,870	0,870	-
Viscosity at 100 °C	ASTM D445	4	6,2	8,6	10,5	12	mm <sup>2</sup> /s
Viscosity at 40 °C	ASTM D445	18,4	37,7	60,2	83,1	102,9	mm <sup>2</sup> /s
Iviscosity index (VIE)	ASTM D2270	115	111	115	110	106	-
Flash point	ASTM D92	192	226	228	228	240	°C
Pour point	ASTM D97	-42	< -36	-36	-27	-27	°C

